


## Umbilical Post Lay Trenching (RS1) subsea 7



Q4 2017 / RS1 CFE SPREAD

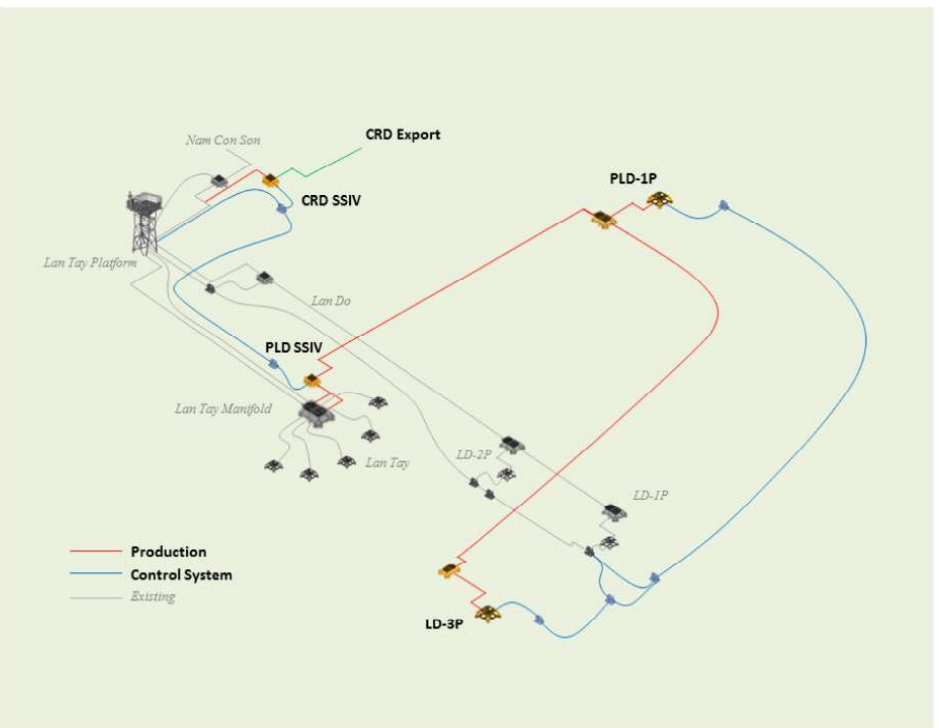

Rotech Subsea were contracted to Subsea7 for Umbilical post lay trenching. This was completed between Lan Tay platform and Phong Lan Dai SSIV with a route length of approximately 4.14Km.

The water depth in the area was 192m.

A Minimum trench depth of 0.9m was excavated to ensure Rotech achieved 0.5m from bottom of umbilical to the mean seabed level as per ROSNEFT Specification.

Rotech once again provided the best technical solution for this scope of work providing a narrow trench to ensure there is no risk of external damage to the product.