


## Post Trenching of Export cable on Race Bank wind farm

Q1 2017 / TRS2 CFE SPREAD

**DONG**  
energy

  
**Jan De Nul**  
GROUP

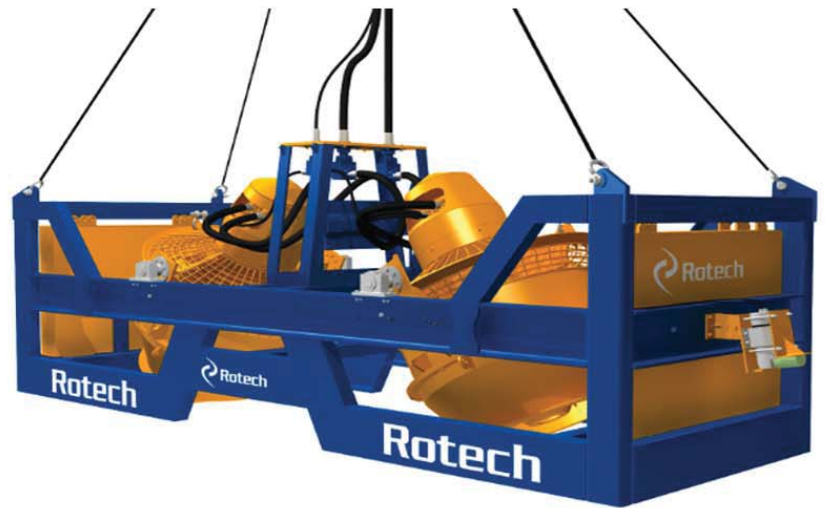

After a successful campaign completing array cable and export cable post trenching for Jan De Nul on Burbo Bank extension, **Rotech Subsea Ltd** were contracted again to carry out post trenching operations of the Export Cable on Race Bank offshore wind farm, offshore Grimsby.

The Rotech Subsea TRS2 spread was mobilised onto the Zwerver III multicat vessel. The TRS2 was safely deployed to perform the post trenching of the export cable to a minimum of 5m DOL to meet Dong Energy's requirements.

Rotech Subsea completed this with a progress rate of 2 metres/minute in 1 pass whilst trenching silty SAND.

Once again **Rotech Subsea Ltd** have completed a post trenching project in a safe, timely manner and to our client's specification.

**Reference – Piet Levrier, Project Manager, Jan De Nul.**