



Applications

- Debris Removal
- Boulder Removal/Relocation Works
- Mattress Recovery

Capabilities

Arm Capacity	3.0 m ³
SWL	15 Te
Weight	4,800 kg
No. of arms	5
Pressure	200 Bar
Flow	40-110 L/min
Height Open	2.80 m
Height Closed	3.50 m
Width Closed	2.62 m
Width Open (internal/external)	3.68/4.04 m


Benefits

- Grab transit/vessel sea-fastening frame
- Industry standard 3/4" wing type hydraulic connectors
- Can be configured for ROV hydraulic supply
- Optional 2x ROV hot stab connections

Personnel

- 2 Rotech operators for 24hr operations

Example RSBG 15 Te Equipment Spread

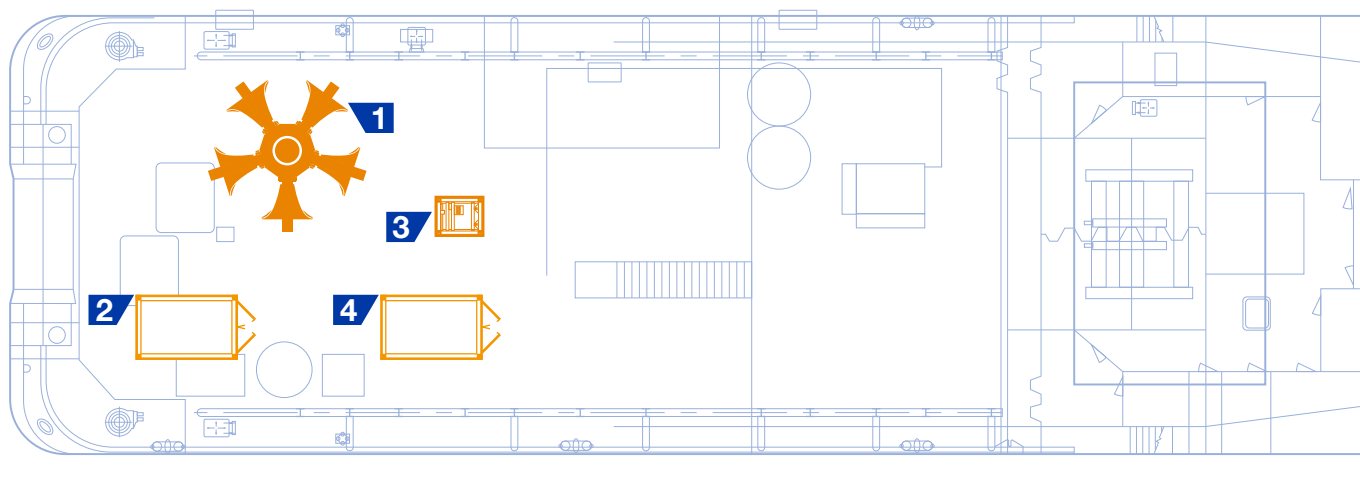

Key

No.	Item	Dimensions (m)	Weight (kg)
1	RSBG 15 Te Tool	2.62 x 2.62 x 3.50	4,800
2	RSBG 15 Te HPU	4.06 x 2.44 x 2.90	7,500
3	RSBG 15 Te Hydraulic Umbilical Winch	1.70 x 1.70 x 1.88	3,000
4	10 Ft Spares Container	3.05 x 2.44 x 2.59	6,000

For over three decades Rotech have pioneered the development of cutting edge subsea Controlled Flow Excavation (CFE) technology. A dedication to innovation has seen Rotech continually evolve and enhance our specialised equipment to meet demand and deliver for the needs of many major clients in the subsea oil & gas and energy sectors.