



## Applications

- Debris Removal
- Boulder Removal/Relocation Works
- Mattress Recovery

## Capabilities

Arm Capacity	0.33 m <sup>3</sup>
SWL	5 Te
Weight	460 kg
No. of arms	5
Pressure	250 Bar
Flow	70/80 L/min
Height Open	0.91 m
Height Closed	1.08 m
Width Open	1.86 m
Width Closed	1.14 m


## Features

- Grab transit/vessel sea-fastening frame
- Industry standard 3/4" wing type hydraulic connectors
- Can be configured for ROV hydraulic supply
- Optional 2x ROV hot stab connections

## Personnel

- 2 Rotech operators for 24hr operations

## Example RSBG 5 Te Equipment Spread

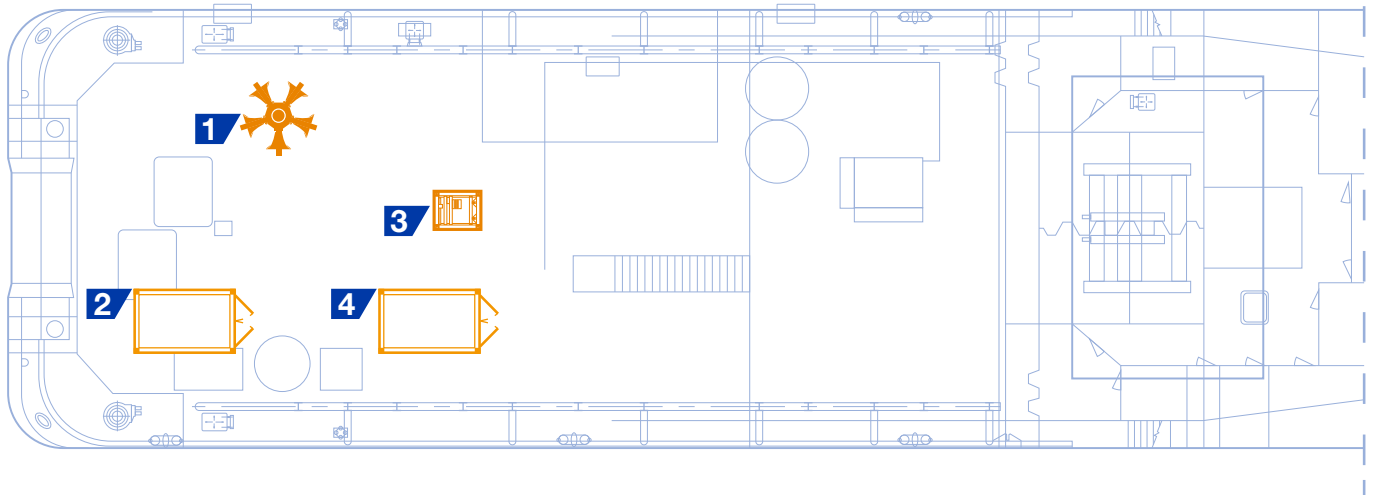

### Key

No.	Item	Dimensions (m)	Weight (kg)
1	RSBG 5 Te Tool	1.14 x 1.14 x 1.08	460
2	RSBG 5 Te HPU	4.06 x 2.44 x 2.90	7,500
3	RSBG 5 Te Hydraulic Umbilical Winch	1.70 x 1.70 x 1.88	3,000
4	10 Ft Spares Container	3.05 x 2.44 x 2.59	6,000

For over three decades Rotech have pioneered the development of cutting edge subsea Controlled Flow Excavation (CFE) technology. A dedication to innovation has seen Rotech continually evolve and enhance our specialised equipment to meet demand and deliver for the needs of many major clients in the subsea oil & gas and energy sectors.