



## Applications

- Cable Cutting and/or Recovery
- Umbilical Cutting and/or Recovery
- Pipeline Recovery
- Cutting of Cable/Umbilical up to 260 mm\*  
\*330 mm available on request
- Cutting of Wire Rope up to 8"

## Capabilities

Maximum flow	70 L/min
Maximum pressure	350 Bar
SWL (Vertical)	12 Te
SWL (Horizontal)	5 Te
Maximum grip force	50 kN
Minimum grab diameter	0.05 m
Maximum grab diameter	1.10 m
Operating depth	0-3000 m*

- Various Guillotine Cutters available for different products. \*Equipment required for operation beyond 200 m water depth may vary.


## Benefits

- Real-time sonar monitoring for locating product
- Subsea camera and lights
- Can be configured for ROV hydraulic supply
- Optional 2x ROV hot stab connections

## Personnel

- 2 Rotech operators for 24hr operations

## Example RSG-C Equipment Spread

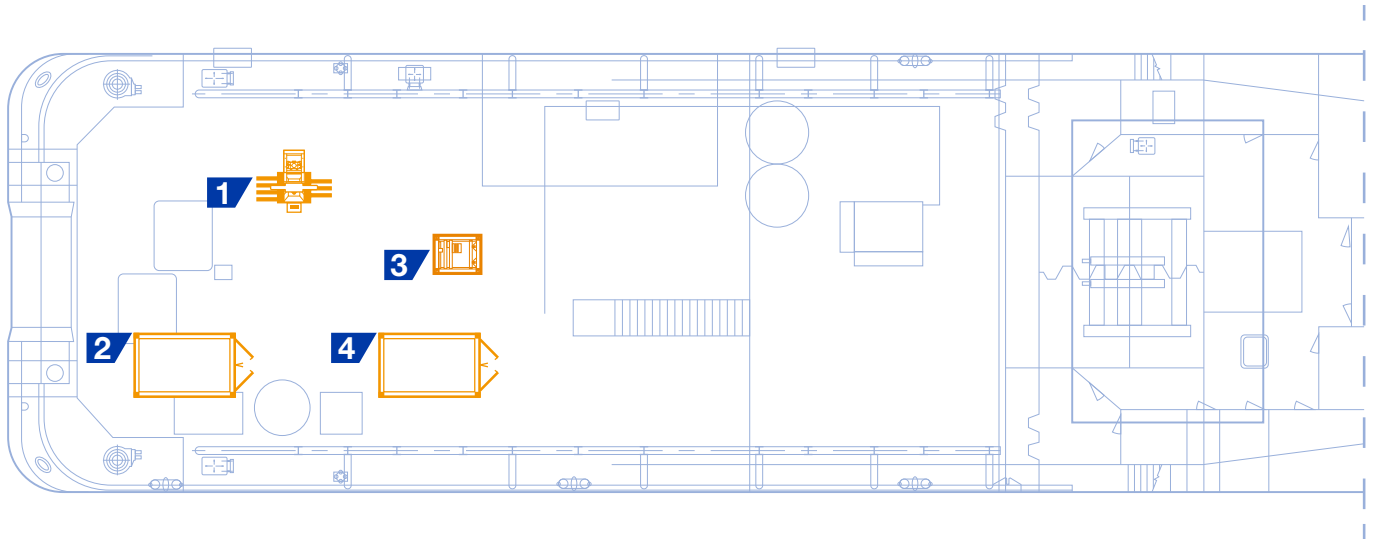

### Key

No.	Item	Dimensions (m)	Weight (kg)
1	RSG-C Tool	2.53 x 2.50 x 2.80	2,900
2	RSG-C HPU	4.06 x 2.44 x 2.90	7,500
3	RSG-C Hydraulic Umbilical Winch	1.70 x 1.70 x 1.88	3,000
4	10 Ft Spares Container	3.05 x 2.44 x 2.59	6,000

For over three decades Rotech have pioneered the development of cutting edge subsea Controlled Flow Excavation (CFE) technology. A dedication to innovation has seen Rotech continually evolve and enhance our specialised equipment to meet demand and deliver for the needs of many major clients in the subsea oil & gas and energy sectors.