



Applications

- Cable Recovery
- Umbilical Recovery
- Pipeline Recovery
- Mattress Recovery

Capabilities

Max Opening Between Tines	1.89 m
Max Circular Grip Diameter	1.10 m
SWL	14 Te
Centre Distance Between Grab	5.34 m
Min Distance Between Grab	4.88 m
Weight	5,500 kg
Operating depth	0-3000 m*

*Equipment required for operation beyond 200 m water depth may vary.


Benefits

- Real-time sonar monitoring for locating product
- Subsea camera and lights
- Can be configured for ROV hydraulic supply
- Optional 2x ROV hot stab connections

Personnel

- 2 Rotech operators for 24hr operations

Example TRSG Equipment Spread

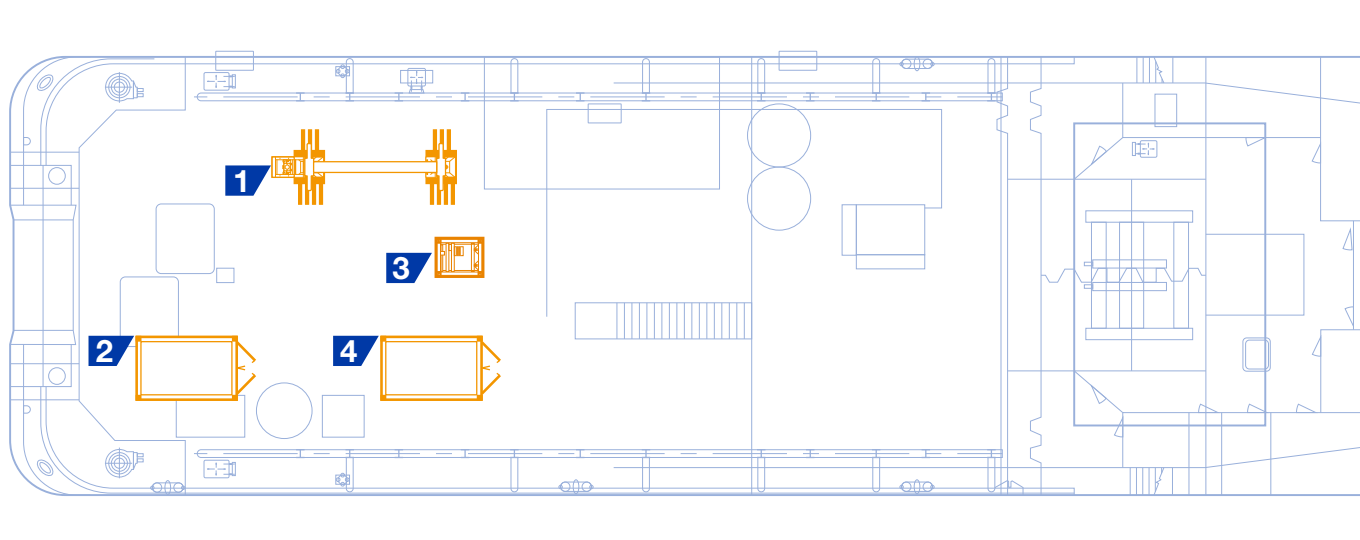

Key

No.	Item	Dimensions (m)	Weight (kg)
1	TRSG Tool	7.18 x 1.70 x 2.00	5,500
2	TRSG HPU	4.06 x 2.44 x 2.90	7,500
3	TRSG Hydraulic Umbilical Winch	1.70 x 1.70 x 1.88	3,000
4	10 Ft Spares Container	3.05 x 2.44 x 2.59	6,000

For over three decades Rotech have pioneered the development of cutting edge subsea controlled flow excavation technology. A dedication to innovation has seen Rotech continually evolve and enhance our specialised equipment to meet demand and deliver for the needs of many major clients in the subsea oil & gas and energy sectors.